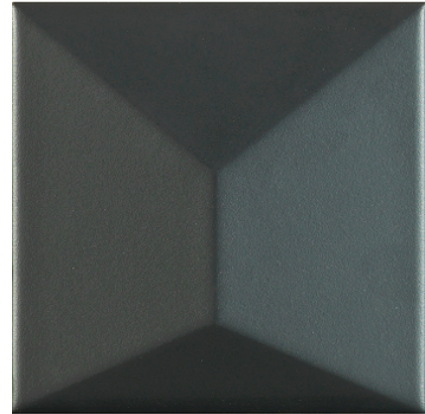


Model: FACES S3 NEGRO**Codes:** 100172939 - L138000361**Group:** G-102**Format:** 12,5X12,5X0,8/2,4**Thickness:** 24 mm

RECOMMENDATIONS

Recommended adhesive	100043280 TIXOCEM PLUS	
Recommended joint	100236472 COLORSTUK NEGRO N	
Recommended joint (wet area)	100236472 COLORSTUK NEGRO N	
Recommended adhesive (wet area)	100043280 TIXOCEM PLUS	

DIMENSIONAL FEATURES

Length and width deviation	$\pm 0.75 \text{ mm} \times \pm 0.75 \text{ mm} \pm 0.5 \text{ mm}$	UNE-EN ISO 10545-2*
Side straightness deviation	$\pm 0.5 \text{ mm}$	UNE-EN ISO 10545-2*
Orthogonality deviation	$\pm 0.75 \text{ mm}$	UNE-EN ISO 10545-2*
Surface flatness deviation	(+0.5%/-0.3%) MM	UNE-EN ISO 10545-2*

FEATURES



Gloss-free



Material suitable for use on indoor walls.



Material suitable for use on shower walls.



Material that stands out for having an asymmetrical surface.

PHYSICAL PROPERTIES

Water absorption	>10% (BIII)	UNE-EN ISO10545-3*
Breaking strength	>600 N	UNE-EN ISO 10545-4*
Coefficient of linear thermal expansion	$< 9 / (10E6 \times K) \text{ } 1 / (10E6 \times K)$	UNE-EN ISO 10545-8*
Resistance to thermal shock	Meets	UNE-EN ISO 10545-9*
Crack resistance	Meets	UNE-EN ISO 10545-11*
Expansion due to moisture	<0.6 mm/m	UNE-EN ISO 10545-10*
Flammability	A1	UNE-EN 13501-1*

CHEMICAL PROPERTIES

Stain resistance	Clase \geq 3	UNE-EN ISO 10545-14*
Resistance to chemicals	GA	UNE-EN ISO 10545-13*

PACKING

Boxes	10 ST/CS	
Pallets	850 ST/PAL	
Sale unit	ST	
Base unit	ST	
Net weight	0.299 KG/ST	
Gross weight	0.325 KG/ST	