


Model: FACES S4 NEGRO

Codes: 100172980 - L138000411

Group: G-102

Format: 12,5X12,5X0,8/2,4

Thickness: 24 mm

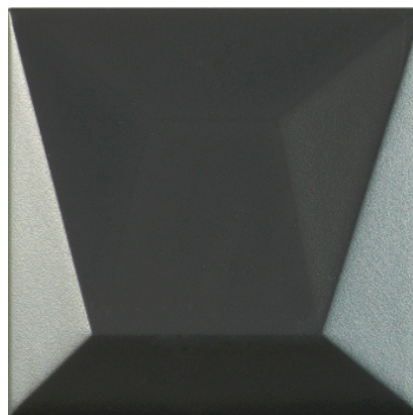

RECOMMENDATIONS

| | | |
|---------------------------------|-----------------------------|--|
| Recommended adhesive | 100043280 TIXOCEM PLUS | |
| Recommended joint | 100236472 COLORSTUK NEGRO N | |
| Recommended joint (wet area) | 100236472 COLORSTUK NEGRO N | |
| Recommended adhesive (wet area) | 100043280 TIXOCEM PLUS | |

DIMENSIONAL FEATURES

| | | |
|-----------------------------|--------------------------|---------------------|
| Length and width deviation | ±0.75 mmx±0.75 mm±0.5 mm | UNE-EN ISO 10545-2* |
| Side straightness deviation | ±0.5 mm | UNE-EN ISO 10545-2* |
| Orthogonality deviation | ±0.75 mm | UNE-EN ISO 10545-2* |
| Surface flatness deviation | (+0.5%/-0.3%) MM | UNE-EN ISO 10545-2* |

FEATURES



Gloss-free



Material suitable for use on indoor walls.



Material suitable for use on shower walls.



Material that stands out for having an asymmetrical surface.

PHYSICAL PROPERTIES

| | | |
|---|-------------------------|----------------------|
| Water absorption | >10% (BIII) | UNE-EN ISO10545-3* |
| Breaking strength | >600 N | UNE-EN ISO 10545-4* |
| Coefficient of linear thermal expansion | <9/(10E6xK) 1/(10E6**K) | UNE-EN ISO 10545-8* |
| Resistance to thermal shock | Meets | UNE-EN ISO 10545-9* |
| Crack resistance | Meets | UNE-EN ISO 10545-11* |
| Expansion due to moisture | <0.6 mm/m | UNE-EN ISO 10545-10* |
| Flammability | A1 | UNE-EN 13501-1* |

CHEMICAL PROPERTIES

| | | |
|-------------------------|---------|----------------------|
| Stain resistance | Clase≥3 | UNE-EN ISO 10545-14* |
| Resistance to chemicals | GA | UNE-EN ISO 10545-13* |

PACKING

| | | |
|--------------|------------|--|
| Boxes | 10 ST/CS | |
| Pallets | 850 ST/PAL | |
| Sale unit | ST | |
| Base unit | ST | |
| Net weight | 0.31 KG/ST | |
| Gross weight | 0.32 KG/ST | |

