

P34707231  
100145751

PARK LINEAL SILVER


PORCELANOSA  
PORCELANOSA Grupo

**Model:** PARK LINEAL SILVER 31,6X90(A)

**Codes:** 100145751 - P34707231

**Water absorption:** BIII

**Thickness:** 9.5 mm

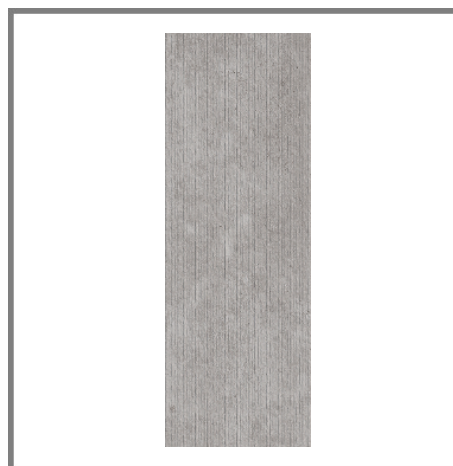

### DIMENSIONAL FEATURES

UNE-EN ISO 10545-2

|                             |             |          |
|-----------------------------|-------------|----------|
| Thickness                   | 9.5 MM      |          |
| Width                       | 314.98 MM   |          |
| Length                      | 900 MM      |          |
| Length and width deviation  | Below 0.15% | <=0.5 %* |
| Side straightness deviation | Below 0.15% | <=0.5 %* |
| Squareness deviation        | Below 0.15% | <=0.6 %* |
| Surface flatness deviation  | Below 0.15% | <=0.5 %* |

\*ISO-13006:2012 UNE-EN 14411:2012

### MECHANICAL FEATURES

UNE-EN ISO 10545-4-6-7-11

|                    |                  |         |
|--------------------|------------------|---------|
| Breaking strength  | 1235 N           | >600 N* |
| Crazing resistance | Resists 3 cycles |         |

\*ISO-13006:2012 UNE-EN 14411:2012

### HYGIENIC FEATURES

UNE-EN ISO 10545-13-14:1995

|                     |   |                |
|---------------------|---|----------------|
| Chemical resistance | Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases" | CLASE B Min. * |
| Stain resistance    | Class 5. Easy cleaning with water   | CLASE 3 Min. * |

\*ISO-13006:2012 UNE-EN 14411:2012

### SCOPE OF USE

|                  |              |  |
|------------------|--------------|--|
| Technical code-1 | Use on walls |  |
|------------------|--------------|--|

### PACKING

|         |                |  |
|---------|----------------|--|
| Boxes   | 1.1376 M2/CS   |  |
| Pallets | 64.8427 M2/PAL |  |
| Units   | 0.2844 M2/ST   |  |

Certificaciones del sistema



Do not use cleaning agents containing hydrofluoric acid.

It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.

For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double glueing technique.

Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.