


Model: CENTURY BEIGE 33,3X100(A)

Codes: 100155738 - V14401381

Water absorption: {VAL}BIII

Thickness: 9.2 mm

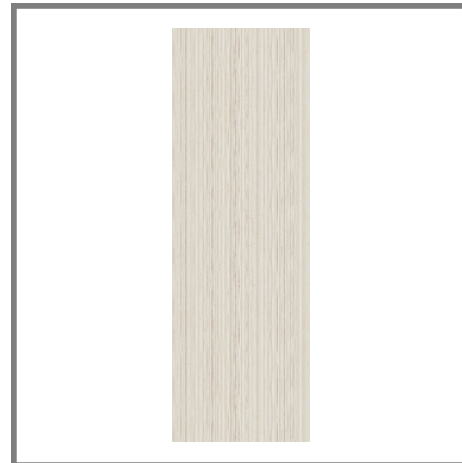

DIMENSIONAL FEATURES

UNE-EN ISO 10545-2

| | | |
|-----------------------------|-------------|----------|
| Thickness | 9.2 MM | |
| Width | 332.8 MM | |
| Length | 1000 MM | |
| Length and width deviation | Below 0.15% | <=0.5 %* |
| Side straightness deviation | Below 0.15% | <=0.5 %* |
| Squareness deviation | Below 0.15% | <=0.6 %* |
| Surface flatness deviation | Below 0.15% | <=0.5 %* |

*ISO-13006:2012 UNE-EN 14411:2012

MECHANICAL FEATURES

UNE-EN ISO 10545-4-6-7-11

| | | |
|--------------------|------------------|--|
| Crazing resistance | Resists 3 cycles | |
|--------------------|------------------|--|

*ISO-13006:2012 UNE-EN 14411:2012

HYGIENIC FEATURES

UNE-EN ISO 10545-13-14:1995

| | | |
|---------------------|---|----------------|
| Chemical resistance | Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases" | CLASE B Min. * |
| Stain resistance | Class 5. Easy cleaning with water | CLASE 3 Min. * |

*ISO-13006:2012 UNE-EN 14411:2012

SCOPE OF USE

| | | |
|------------------|--------------|--|
| Technical code-1 | Use on walls | |
|------------------|--------------|--|

ANTI-SLIP VALUE

UNE-ENV 12633:2003, DIN-51130 y ASTM C1028

| | | |
|----------------|---|--|
| Friction (dry) | 0 | |
| Friction (wet) | 0 | |

*ISO-13006:2012 UNE-EN 14411:2012

PACKING

| | | |
|---------|--------------|--|
| Boxes | 1.332 M2/CS | |
| Pallets | 73.26 M2/PAL | |
| Units | 0.333 M2/ST | |

System Certification



Do not use cleaning agents containing hydrofluoric acid.

It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.

For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double glueing technique.

Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.